



APPLICATIONS

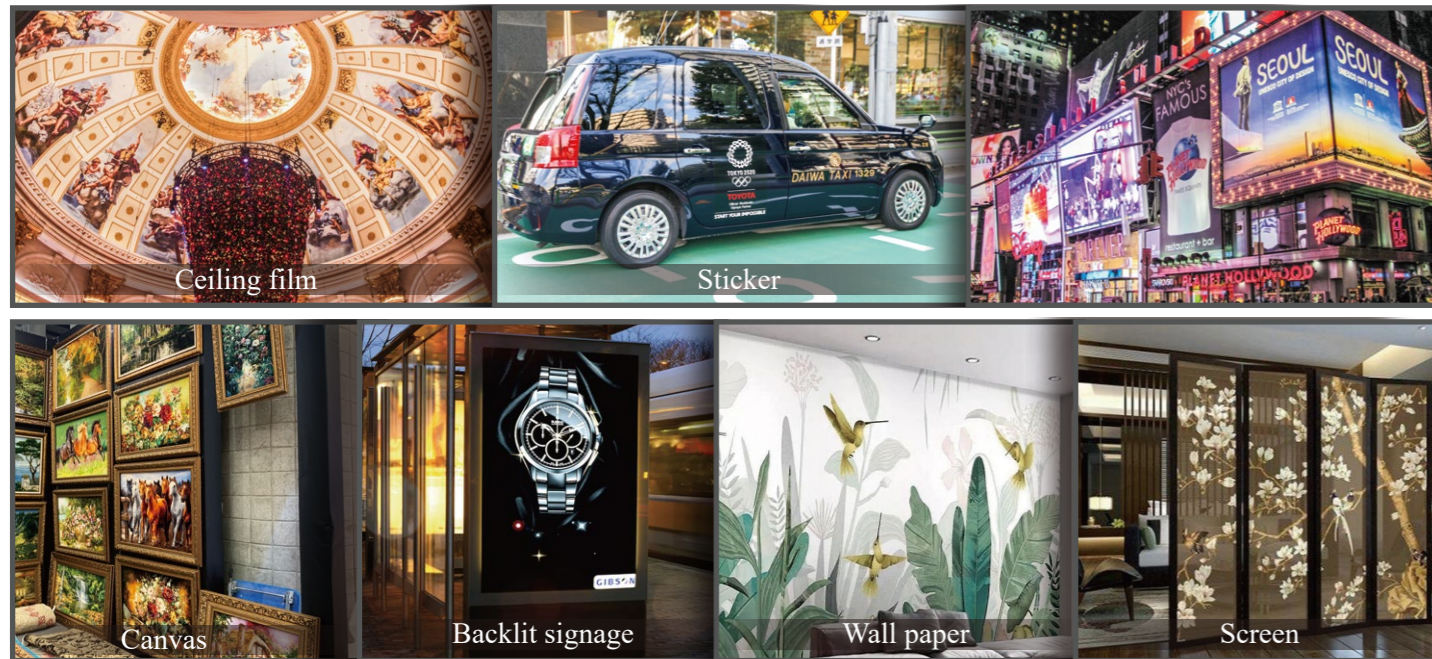

GIBSON IMAGE

GIB 3200 UV Hybrid Printer

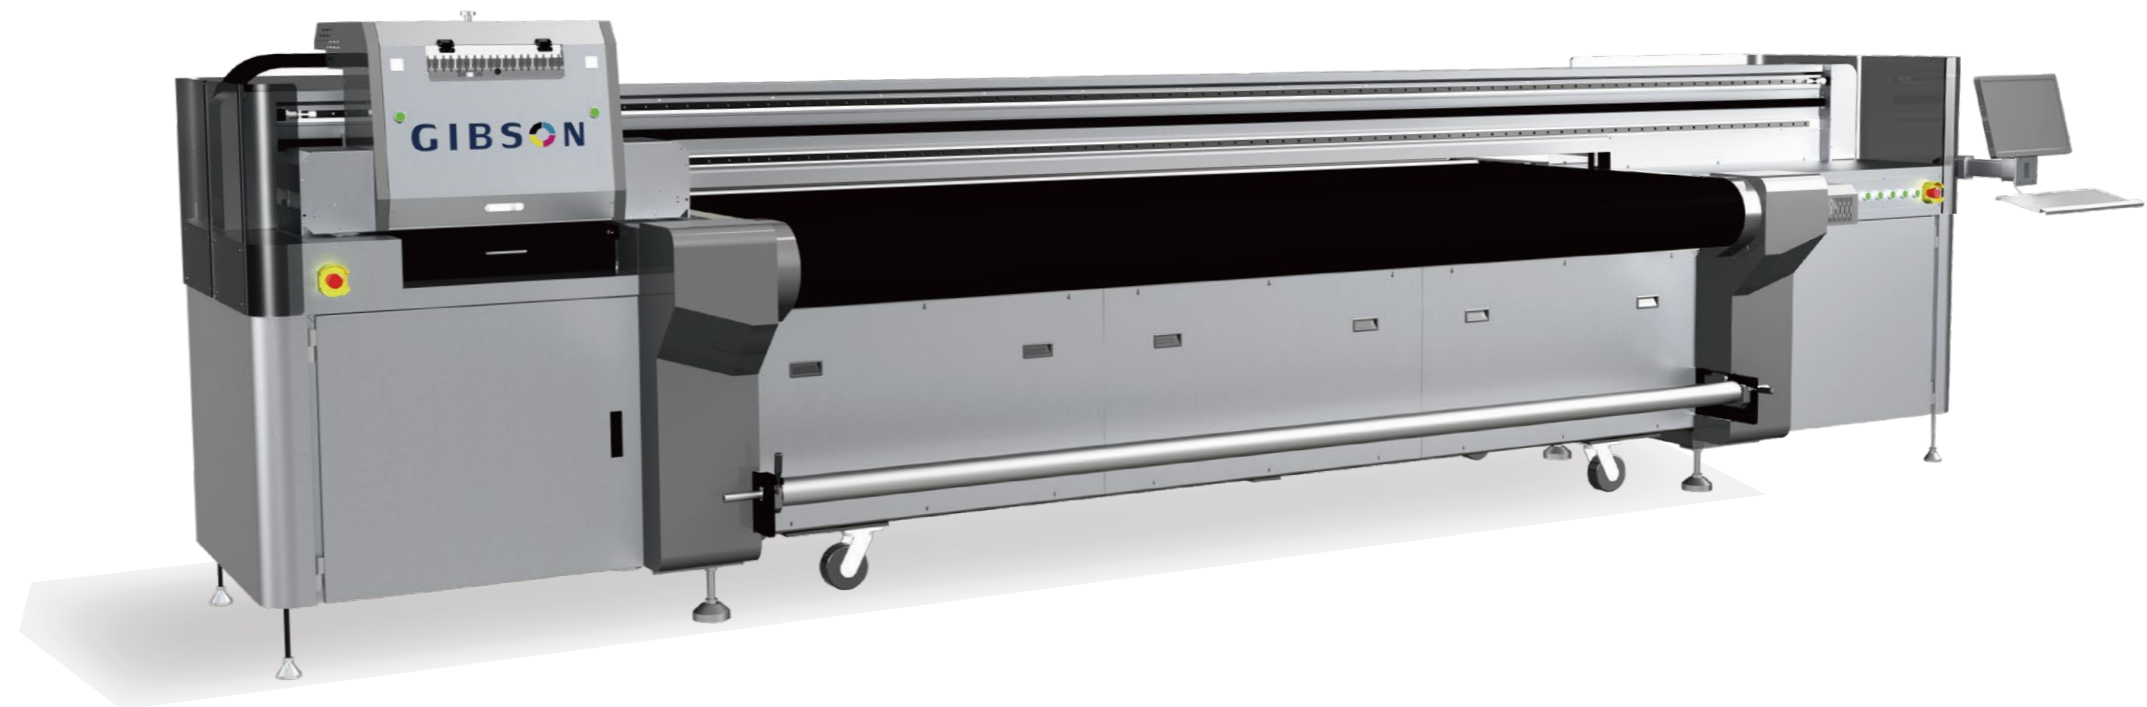

sistemasoluciones


Av. Belgrano 748 - Piso 4 Oficina 43
C.A.B.A. - C1092AAU - Argentina
info@sistemasoluciones.com
Tel/Fax: (011) 4342 5742
www.sistemasoluciones.com

GIBSON UV Hybrid Printer

GIBSON Hybrid UV inkjet printer features continuous and stable feeding of rigid and flexible media, thanks to unique design and technology patent, realizing really whole roll worry-free printing. Create stunning print each time



WHITE & VARNISH

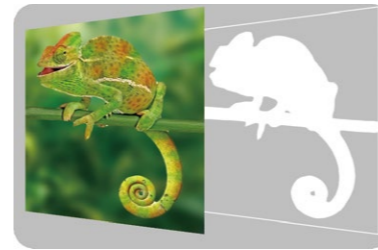

White Upper-layer




5 layers printing



Embossed printing



Image A-White-Image B

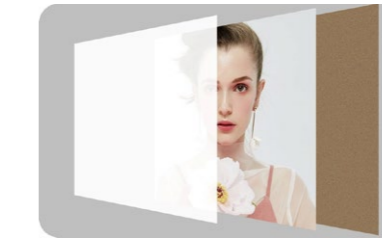


White Under-layer



White-color-varnish

PRINTER DETAILS




Intelligent suction auto-control
Intelligent variable suction for board and flexible media




Belt-shifting auto-correction
Enable stable media feeding and movement



Dual-roll printing
Air Inflatable Shaft allow heavy-duty or light media reliable feeding. Dual roll printing boost productivity for small roll



Y-axis precision control
High precision motor and reducer ensure best stepping accuracy



Electrically position bar
one switch control make position easy and convenient

- Continuous printing after power off
- 5 layers printing
- 3D embossed effect
- UL standard



Patent of wrinkle-free Feeding structure
100m wrinkle free continuous printing realize worry-free whole roll/large size image work



TECHNICAL SPECIFICATION

Model	GIB3200	
Printhead	Ricoh Gen5 7-14-21 PL	Ricoh Gen6 5-10-15 PL
Color mode	K C M Y Lc Lm W Varnish / Primer	
Material Thickness	0~50mm	
Print size	Width 3200mm Length no limit	
Billboard speed	55m ²	63m ²
Production speed	40m ²	45m ²
Quality speed	31m ²	38m ²
Curing system	UV LED lamp	
Ink type	UV Curing ink	
Ink capacity	3L drums, automatic surveillance for shorting of ink, non-stop add ink	
Ink supply system	Auto negative ink supply	
Media	Glass, Acrylic, Ceramic, Metal, Paper, Wood, Leather, Flex banner, Wallpaper, Car sticker, Soft film, PVC, PP, PE, PTFE, ...	
RIP software	Onyx, Caldera	
Working condition	Humidity 38%-60% RH, Temperature 15°C-28°C, ventilation and low dust, avoid direct sunlight	
PC system	Windows 7, Windows 10	
Power supply	6.5KW, single phase AC200~240V, 50/60HZ, 32A	
Dimensional (LxWxH)	5800mm x 1690mm x 1600mm	
Weight	2000KG	
Safety certification	CE certification	

Above specifications are subject to change without prior notice.

LARGE FORMAT UV LED HYBRID