
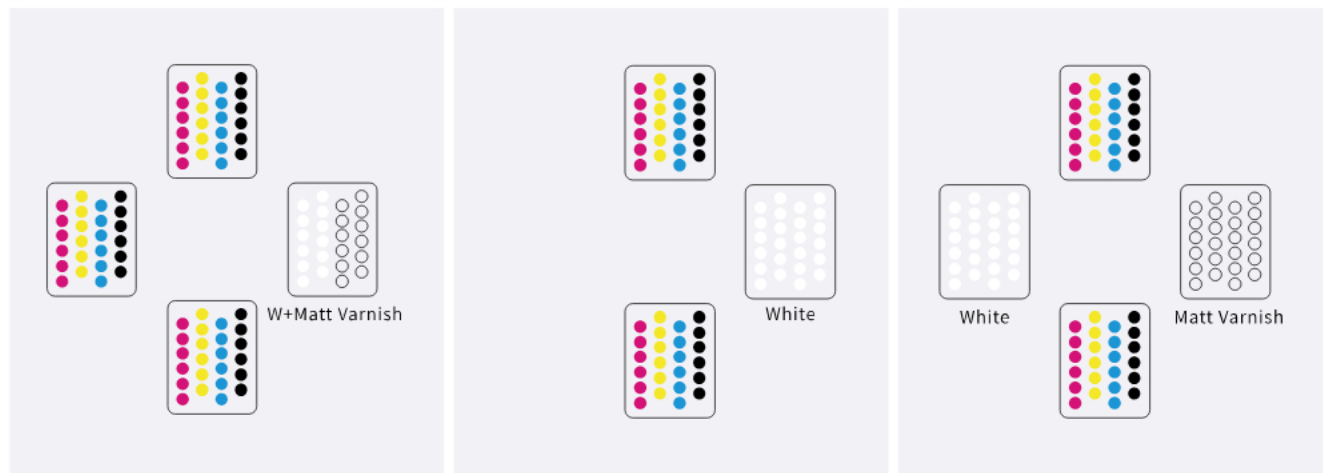


HI1804 UV

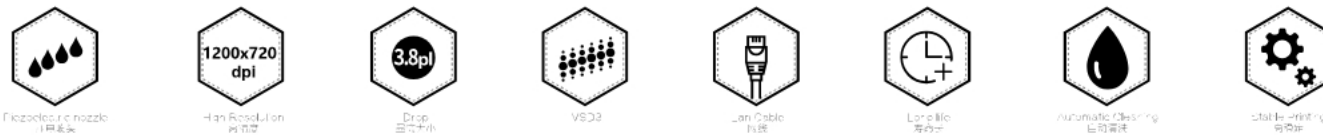

4Head C+W+C+Matt V Option

Mode	CWC/WC/CV	C*3
Draft	21M ² /h	56M ² /h
Production	16M ² /h	42M ² /h

Two modes switch freely

4Head C+W+C Option

Mode	CWC/WC/CW	C*2
Draft	21M ² /h	42M ² /h
Production	16M ² /h	33M ² /h

Applications:
Advertising Industry


4Head C+W+C+Matt V Option

Mode	CWC/WC/CV	C*2
Draft	21M ² /h	42M ² /h
Production	16M ² /h	33M ² /h

Applications:
Matt effect sticker for glass(Advertising Industry)

Mode 产品型号	HI1804 UV
Media Width/Print Width 进料/打印最大宽幅	1850mm/1800mm
Head Qty 喷头数量	4 Head CMYK WV
Printing Speed 打印速度	详见列表
Ink Model 墨水类型/颜色	UV ink/ 4 Color (YMCK) 6 Color (YMCKWV) (C,M,Y,K) 7色 (C,M,Y,K, W哑/亮光光油)
Ink Supply Method 供墨系统	Digital Inkjet System 数码压墨系统
Applicable Media 介质类型	Both Rigid/Roller Media Support, Suit For Leather, Decoration, Advertising Industry Printing Media: Leather,KT Board, Wallpaper, Film, Car Sticker, PVC Flm.Etc 板卷两用, 适用于皮革行业, 家装行业, 广告行业等 适用材料: 皮革, KT板, 墙纸, 软膜, 车贴, PVC软膜等
Maximum Media Thickness 喷头高度	Adjustable Height2-30mm 材料高度2-30mm
UV Curing Method 固化系统	Water Cooling UV LED Lamp LED水冷UV灯系统 (UV)
Media suck/DrySystem 介质吸附/烘干系统	Adjustable Table Vacuum Zones/Infrared Dryer And Fan System 分区吸风吸力可调/配备红外+风扇
Auto Feeding Device 自动放布装置	Air Shaft In Feeding And Take Up System 气胀轴收放料系统
Auto Head Cleaning System 喷头自动清洗系统	Auto Cleaning And Keep Head Wet 自动清洗具有防堵闪喷功能及保湿
Rip Software RIP软件	Maintop/Photoprint
Operating System 操作环境	Temperature:18-32°C, Humidity:46-65% 温度:18-32°C, 湿度:46-65%
Work Environment 使用环境	WINXP/WIN7/ WIN10
Machine/Package Size 机器/包装尺寸	3800*1100*1580/4000*1100*1600
Machine/Package Weight 机器/包装重量	700/820KG

Photo 细节展示

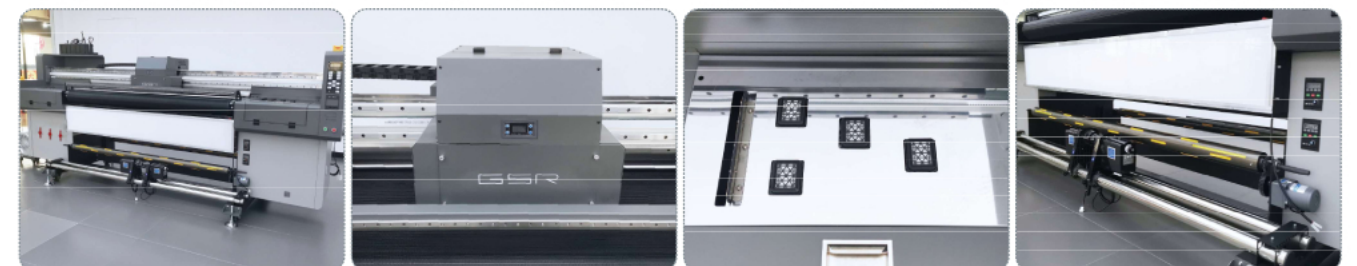

Contacto
Tel: +54 11 4342-5742
info@sistemasysoluciones.com
www.sistemasysoluciones.com